

FIXED SHEATH INDUSTRIAL PROBE


.375" (3/8") DIAMETER SHAFT WITH STAINLESS STEEL CONNECTION HEAD

MODEL # IND6801XX-X

Replace First "X" in table with Thermocouple Type J, K, or T and Double that letter (KK) for Dual.

Replace Second "X" in table with Junction Type Grounded (G), Ungrounded (U), or Exposed (E).

| PART NUMBER | "A" DIMENSION |
|--------------|---------------|
| IND6801XX-4 | 4" |
| IND6801XX-6 | 6" |
| IND6801XX-12 | 12" |
| IND6801XX-24 | 24" |
| IND6801XX-36 | 36" |

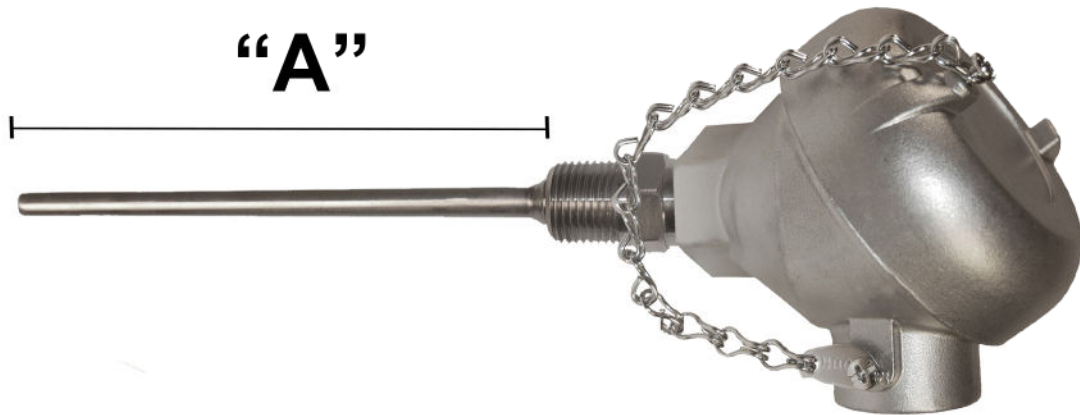

SPECIFICATIONS

| | | |
|----------------------|---------------------------------|----------------------------|
| Specification/ Model | IND6801 | |
| Sensor Type | Type K (Chromel / Alumel) | Type J (Iron / Constantan) |
| Temp. Range | 32°F ~ 2200°F | 32°F ~ 1382°F |
| Connection Head | Stainless Steel | |
| Sensor O.D. | .375" (3/8") Diameter 316 SST | |
| Junction Type | Grounded / Ungrounded / Exposed | |
| Elements | Single / Dual | |
| "A" Dimension | 4" , 6" , 12" , 24" , 36" | |
| "B" Dimension | 0" | |
| Hardware | Welded Nipple 1/2 x 1/2 NPT | |